


VIEW OF SUZUKI GS750



Left Side

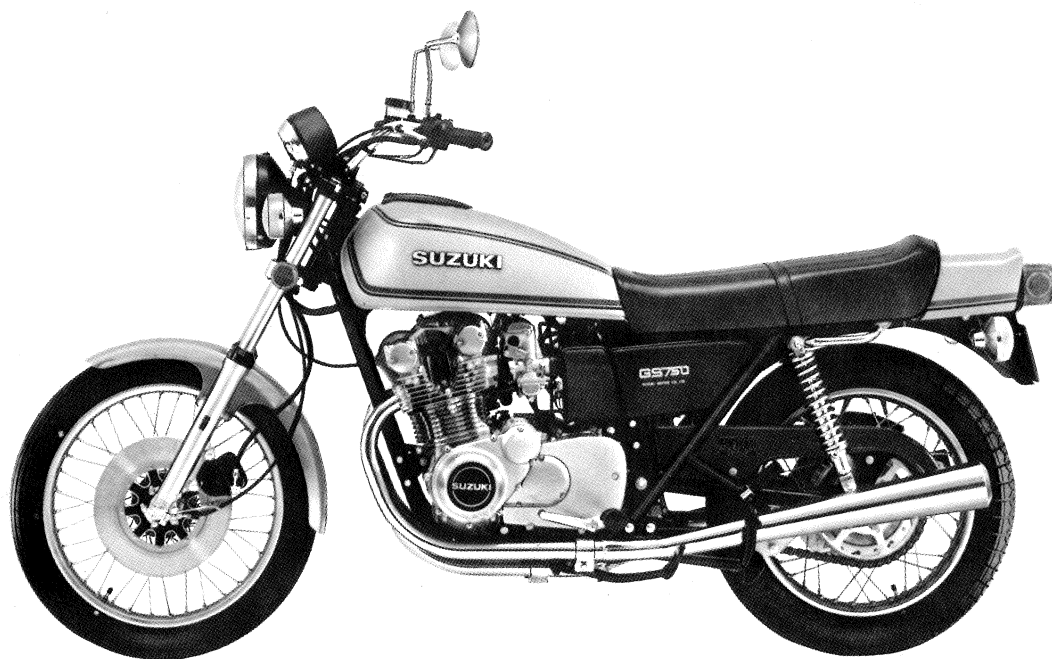

Right Side

Carburetor cleaning

Clean and inspect the carburetors by referring to the circuit diagram:

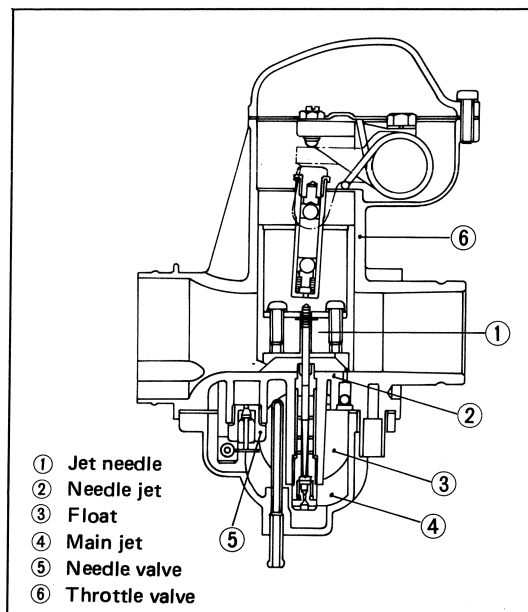


Fig. 1-50

Note: Do not disturb the screw shown in the photo.

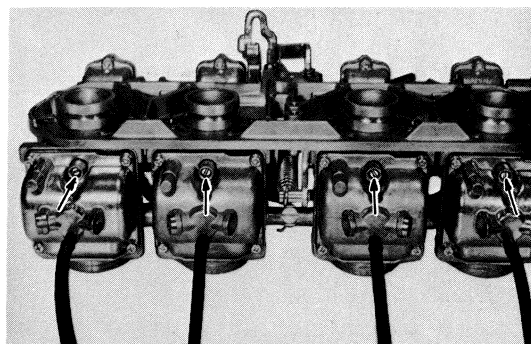


Fig. 1-51

Checking fuel level in each float chamber

1. Leave fuel cock lever in "ON" or "RES" position.
2. Remove float chamber screw and install the fuel level gauge (special tool).
3. Move fuel cock lever to "PRI" position to admit fuel into float chamber.
4. With the float chamber filled with fuel, turn the cock lever back to "ON" position, and start up the engine.

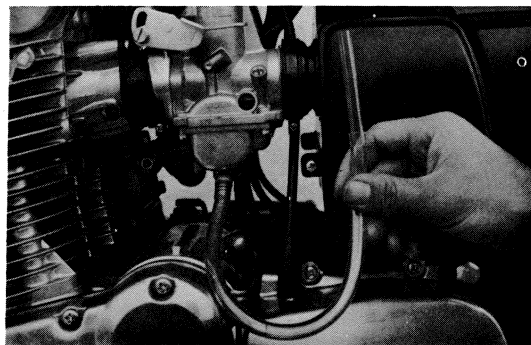


Fig. 1-52